




216 PR 2x49W T16 G5 EB

Code: 12.1674.2492.1

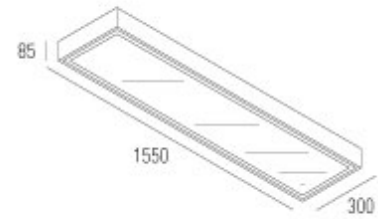

Photometric Data

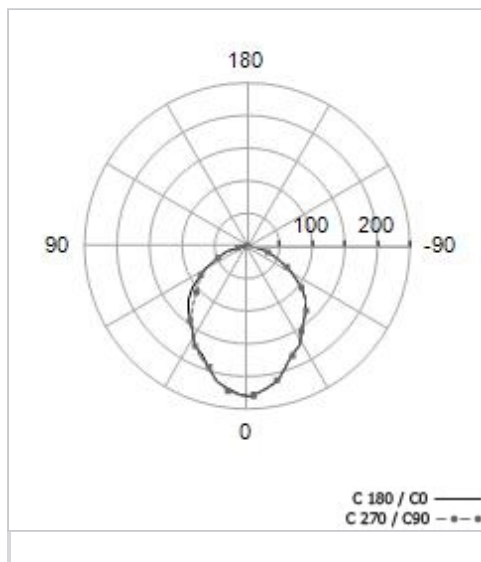

Lamp	
Light output ratio	
LOR	55,8%
ULOR	0%
DLOR	55,8%
Total luminous flux	
4799 lm	
Luminaire efficacy (LEF)	
49 lm/W	
UGR values	
X=4H, Y=8H	S=0,25H
Radiant class	
70/50/20	
UGR - transverse	
UGR - longitudinal	
Classification	
BZ	
UTE	
DIN	
CIE	

Description

Housing: steel sheet, white colour

Painting: electrostatic powder coating, UV- stabilized, upon phosphate treatment

Diffuser: prismatic PMMA diffuser, spring fastening, the diffuser stay hooked on during maintenance

Control gear: complete with magnetic or electronic ballast (EB) – option: emergency version (EM) include also battery and inverter for continuous emergency lighting

Power supply: 230V, 50Hz

Maintenance: easy lamp replacement without tools

216 PR 2x49W T16 G5 EB

Code: 12.1674.2492.1

Options

12.1674.2492.1	216 PR 2x49W T16 G5 EB	5,6
12.1671.2492.1	216 PR 2x49W T16 G5 DEB - DALI	5,6
12.1675.2492.1	216 PR 2x49W T16 G5 DEB - DSI	5,6
12.1673.2492.1	216 PR 2x49W T16 G5 DEB - 1 - 10V	5,6
12.1676.2492.1	216 PR 2x49W T16 G5 MB EM 1h	5,6
12.1677.2492.1	216 PR 2x49W T16 G5 EB EM 1h	5,6
12.1672.2492.1	216 PR 2x49W T16 G5 DEB - DALI EM 1h	5,6
12.1678.2492.1	216 PR 2x49W T16 G5 DEB - DSI EM 1h	5,6
12.1679.2492.1	216 PR 2x49W T16 G5 DEB - 1 - 10V EM 1h	5,6